

# Set-membership identification of block-structured nonlinear feedback systems

***V. Cerone, D. Piga, D. Regruto***

*Dipartimento di Automatica e Informatica*

*Politecnico di Torino (Italy)*

*e-mail: vito.cerone@polito.it, dario.piga@polito.it, diego.regruto@polito.it*




*48th IEEE Conference on Decision and Control and 28th Chinese Control Conference*

*Session ThA14: "Identification of Block Structured Models"*

*Shanghai, China — December 17, 2009*

# Nonlinear feedback systems

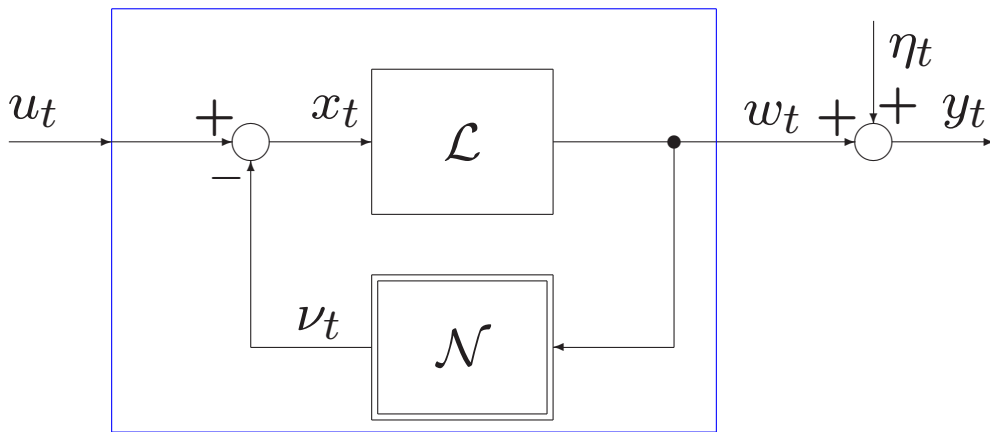

$\mathcal{N}$ : nonlinear static block

$\mathcal{L}$ : linear dynamic subsystem

$x_t, \nu_t$ : **not measurable** inner signals

$u_t$ : known input signal

$y_t$ : noise-corrupted measurement of  $w_t$

$$\nu_t = \mathcal{N}(w_t) = \sum_{k=1}^n \gamma_k w_t^k \quad \text{with } n: \text{polynomial degree}$$

$$w_t = \frac{B(q^{-1})}{A(q^{-1})} x_t \quad \text{with} \quad \begin{aligned} A(q^{-1}) &= 1 + a_1 q^{-1} + \dots + a_{na} q^{-na} \\ B(q^{-1}) &= b_0 + b_1 q^{-1} + \dots + b_{nb} q^{-nb} \\ q^{-1} w_t &= w_{t-1} \end{aligned}$$

## Problem formulation

**Aim:** compute **bounds** on the parameters  $\gamma^T = [\gamma_1, \gamma_2 \dots \gamma_n]$  and  $\theta^T = [a_1 \dots a_{na} \ b_0 \dots b_{nb}]$

**Prior assumption on the system:**

- BIBO **stability**
- $na$  and  $nb$  are **known**
- $n$  is finite and **known**
- the **steady-state gain** of the linear subsystem is **not zero**
- a rough **upper bound** on the settling time of the system is known

**Prior assumption on the measurement uncertainty:**

- $\eta_t$  is UBB:  $|\eta_t| \leq \Delta\eta_t$
- $\Delta\eta_t$  is **known**

## Proposed solution

Three-stage procedure:

- **First stage:** computation of **bounds** on the nonlinear block parameters  $\gamma$ .
- **Second stage:** computation of **bounds** on the **inner (unmeasurable) signal**  $x_t$ .
- **Third stage:** computation of **bounds** on the **linear block** parameters  $\theta$ .

## Proposed solution: first stage

Bounds on the parameters  $\gamma$  of the nonlinear block:

Stimulate the system with square-wave of  $M$  different amplitude and get **steady-state measurements**

The **feasible parameters set  $\mathcal{D}_\gamma$**  of the nonlinear block is described as:

$$\mathcal{D}_\gamma = \left\{ \gamma \in \mathbb{R}^n : (\bar{y}_s - \bar{\eta}_s) + \sum_{k=1}^n \gamma_k (\bar{y}_s - \bar{\eta}_s)^k = \bar{u}_s, \right. \\ \left. |\bar{\eta}_s| \leq \Delta \bar{\eta}_s; \quad s = 1, \dots, M \right\},$$

**$\mathcal{D}_\gamma$  is the set of all parameters  $\gamma$  consistent with the  $M$  given measurements, the error bounds and the assumed model structure**

Bounds on parameter  $\gamma_k$ :

$$\gamma_k^{\min} = \min_{\gamma \in \mathcal{D}_\gamma} \gamma_k \qquad \gamma_k^{\max} = \max_{\gamma \in \mathcal{D}_\gamma} \gamma_k$$

## Proposed solution: first stage

Computation of  $\gamma_k^{min}$  and  $\gamma_k^{max}$ :

$$\gamma_k^{min} = \min_{(\gamma, \bar{\eta}) \in \mathcal{D}_{\gamma \bar{\eta}}} \gamma_k \quad \gamma_k^{max} = \max_{(\gamma, \bar{\eta}) \in \mathcal{D}_{\gamma \bar{\eta}}} \gamma_k$$

where:

$$\bar{\eta} = [\bar{\eta}_1 \ \bar{\eta}_2 \ \dots \ \bar{\eta}_M]^T,$$

$$\bar{\eta} = \left\{ (\gamma, \bar{\eta}) \in \mathbb{R}^n \times \mathbb{R}^M : (\bar{y}_s - \bar{\eta}_s) + \sum_{k=1}^n \gamma_k (\bar{y}_s - \bar{\eta}_s)^k = \bar{u}_s, \right. \\ \left. |\bar{\eta}_s| \leq \Delta \bar{\eta}_s; \quad s = 1, \dots, M \right\}$$

$\mathcal{D}_{\gamma \bar{\eta}}$  is a **semialgebraic set** over  $\mathbb{R}^{n+M}$

The above problems are **semialgebraic (nonconvex) optimization problems**

## Proposed solution: first stage

Standard **nonlinear optimization tools** can not be exploited to compute  $\gamma_k^{min}$  and  $\gamma_k^{max}$  since they can trap in **local minima**



The **true value** of  $\gamma_k$  **could not lie** in  $[\gamma_k^{min}, \gamma_k^{max}]$

**Relax** original identification problems to **convex** optimization problems



**Bounds** on each parameter  $\gamma_k$  can be obtained

## Convex relaxation

**MI relaxation** for semialgebraic optimization problems:

– SOS decomposition

P. Parrillo, “Semidefinite programming relaxations for semialgebraic problems”, *Mathematical Programming* 2003

– Theory of moments

J. B. Lasserre, “Global optimization with polynomials and the problem of moments”, *SIAM J. on Opt.* 2001

$k$ -relaxed bounds  $\gamma_k^{min^\delta}$  and  $\gamma_k^{max^\delta}$  computed solving the following **SDP problems**:

$$\gamma_k^{min^\delta} = \min_{x \in \mathcal{D}_x^\delta} f(x) \quad \gamma_k^{max^\delta} = \max_{x \in \mathcal{D}_x^\delta} f(x)$$

where:

LMI decision variables

$f(x)$ : linear function

$\mathcal{D}_x^\delta$ : Convex set described by LMI constraints



## Tightness and convergence

**Property 1** —  $\delta$ -relaxed bounds **become tighter as  $\delta$  increases**:

$$\begin{aligned}\gamma_k^{min^\delta} &\leq \gamma_k^{min^{\delta+1}} \leq \gamma_k^{min} \\ \gamma_k^{max^\delta} &\geq \gamma_k^{max^{\delta+1}} \geq \gamma_k^{max}\end{aligned}$$

**Property 2** —  $\delta$ -relaxed bounds **converge to the true bounds** as  $\delta \rightarrow \infty$ :

$$\begin{aligned}\lim_{\delta \rightarrow \infty} \gamma_k^{min^\delta} &= \gamma_k^{min} \\ \lim_{\delta \rightarrow \infty} \gamma_k^{max^\delta} &= \gamma_k^{max}\end{aligned}$$

## Computational complexity of the LMI relaxation

In practice, due to an high computational complexity, LMI relaxation techniques can be exploited only for a **small set of measurements**



A **reduction of the complexity** of SDP relaxed problems is necessary

## Reduced complexity of the relaxed problems

$$\mathcal{D}_{\gamma\bar{\eta}} = \left\{ (\gamma, \bar{\eta}) \in \mathbb{R}^n \times \mathbb{R}^M : (\bar{y}_s - \bar{\eta}_s) + \sum_{k=1}^n \gamma_k (\bar{y}_s - \bar{\eta}_s)^k = \bar{u}_s, \right. \\ \left. |\bar{\eta}_s| \leq \Delta \bar{\eta}_s; \quad s = 1, \dots, M \right\}$$

**Property 3** The variables  $\bar{\eta}_s$  defining  $\mathcal{D}_{\gamma\bar{\eta}}$  **are not correlated** with each other

**Remark** In constructing moment matrix defining  $\mathcal{D}_x^\delta$  do **not consider the correlation** between variables  $\bar{\eta}_s$


## Reduced complexity of the relaxed problems

Value of  $M$  greater than 400 can be exploited in the identification (for  $\delta \leq 4$ )

Property 4 — Convergence to tight bounds is preserved

## Proposed solution: second stage

Bounds on the inner signal  $x_t$ :

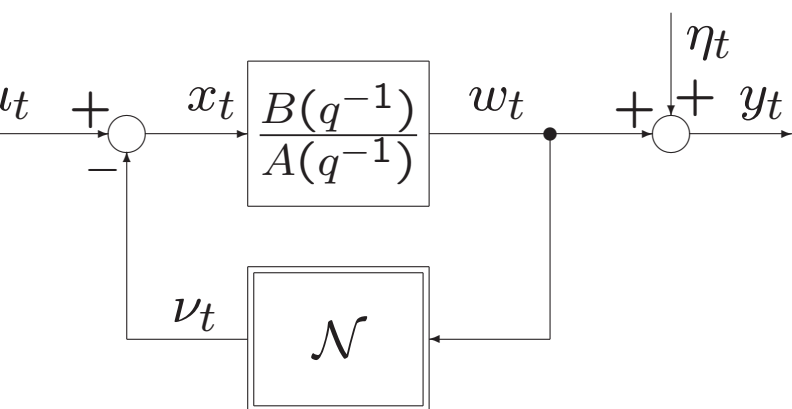

$$x_t^{min} = u_t - \nu_t^{max}$$

$$x_t^{max} = u_t - \nu_t^{min}$$

$$\nu_t^{min} = \min_{(\gamma, \bar{\eta}) \in \mathcal{D}_{\gamma \bar{\eta}}, |\eta_t| \leq \Delta \eta_t} \sum_{k=1}^n \gamma_k (y_t - \eta_t)^k$$

$$\nu_t^{max} = \max_{(\gamma, \bar{\eta}) \in \mathcal{D}_{\gamma \bar{\eta}}, |\eta_t| \leq \Delta \eta_t} \sum_{k=1}^n \gamma_k (y_t - \eta_t)^k$$

- Stimulate the system with a persistently exciting input signal  $u_t$
- Bounds on  $\nu_t$  can be computed by means of **LMI relaxation**
- Structure** of the problem can be exploited to reduce the computation complexity

## Proposed solution: third stage

Bounds on the linear block parameters  $\theta$ :


anner signal  $x_t$  described in terms of its central value  $x_t^c$  and its perturbation  $\delta x_t$ :

$$x_t = x_t^c + \delta x_t$$

h:

$$|x_t| \leq \Delta x_t, \quad x_t^c = \frac{x_t^{\min} + x_t^{\max}}{2}, \quad \Delta x_t = \frac{x_t^{\max} - x_t^{\min}}{2}$$

identification of a linear model with noisy output sequence  $\{y_t\}$  and uncertain input sequence  $\{x_t\}$

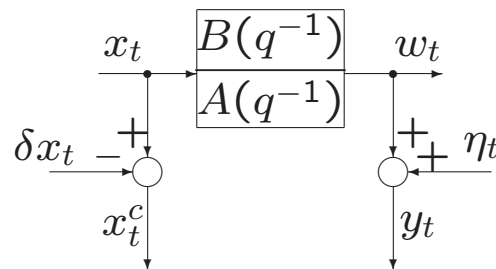

**Errors-in-variables (EIV) problem with bounded errors**

## Proposed solution: bounds on $\theta$

exploiting **previous** results on EIV problems with bounded errors

(Cerone, "Feasible parameter set of linear models with bounded errors in all variables", *Automatica* 1993)



**Bounds** on  $\theta_j$  are computed by means of **linear programming**

## Example

### Parameters of the simulated system

$$\begin{aligned}
 (w_t) &= -1.5w_t + 1.2w_t^2 + 0.9w_t^3 \\
 (q^{-1}) &= 1 - 1.5193q^{-1} + 0.5326q^{-2} \\
 (q^{-1}) &= 0.1549q^{-1} - 0.1416q^{-2}
 \end{aligned}$$

### Measurements output errors

$$\epsilon_s \leq \Delta \bar{\eta}_s, \quad \{\bar{\eta}_s\} \text{ random variables belonging to } [-\Delta \bar{\eta}_s, +\Delta \bar{\eta}_s]$$

$$\epsilon_t \leq \Delta \eta_t, \quad \{\eta_t\} \text{ random variables belonging to } [-\Delta \eta_t, +\Delta \eta_t]$$

During the simulated experiment the **SNR** is about **25db**.



nonlinear block parameters: central estimates and parameters bounds ( $M = 50$ ,  $\delta = 3$ )

True Value	$\gamma_k^{min}$	$\gamma_k^c$	$\gamma_k^{max}$	$\Delta\gamma_k$
-1.5000	-1.5369	-1.4890	1.4410	0.0480
1.2000	1.1931	1.2072	1.2213	0.0141
0.9000	0.8898	0.9020	0.9141	0.0121

$$\Delta\gamma_k = \frac{\gamma_k^{max} - \gamma_k^{min}}{2}$$

## Linear block parameters: central estimates and parameters bounds

N	True Value	$\theta_j^{min}$	$\theta_j^c$	$\theta_j^{max}$	$\Delta\theta_j$
100	-1.5193	-2.0326	-1.6422	-1.2518	0.3904
	0.5326	0.3046	0.6364	0.9681	0.3318
	0.1549	0.1424	0.1579	0.1734	0.0155
	-0.1416	-0.2201	-0.1232	-0.0264	0.0969
300	-1.5193	-1.8569	-1.5633	-1.2697	0.2936
	0.5326	0.3265	0.5761	0.8256	0.2496
	0.1549	0.1452	0.1555	0.1659	0.0104
	-0.1416	-0.1951	-0.1348	-0.0746	0.0602

$$\Delta\theta_j = \frac{\theta_j^{max} - \theta_j^{min}}{2}$$

## Conclusion

- **Three stage procedure** to evaluate parameters bounds of a **nonlinear feedback system**
- Bounds on the nonlinear block parameters have been evaluated by means of **LMI relaxation** techniques
- The particular structure of the identification problems allows the **reduction of the complexity** of the LMI relaxation
- **Convergence** to tight bounds is guaranteed
- **Bounds on the parameters of the linear block** has been computed through the evaluation of bounds on the unmeasurable inner signal  $x_t$